


Sodium Silicate D™

Characteristics	Specification
Wt. Ratio SiO ₂ /Na ₂ O	2.00
%Na ₂ O	14.7
%SiO ₂	29.4
Density @ 68°F (20°C) °Be	50.5
Density @ 68°F (20°C) lb/gal	12.8
Density @ 68°F (20°C) g/cm ³	1.53
pH	12.8
Viscosity Centipoises	400
Characteristics	Clear to opalescent liquid

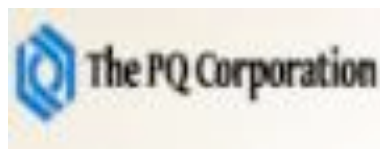

Uses: Catalysts and silica gels; soaps and detergents; adhesives, especially sealing and laminating paper board containers; water treatment; bleaching and sizing of textiles and paper pulp; ore treatment soil solidification; glass foam; pigments; drilling fluids; binder for abrasive wheels, foundry cores and molds; waterproofing mortars and cements; flame retardant; chemical equipment lining.

Packaging: 55 gallon drum